


How to Order Sanitary Hose Assemblies

Build Your Assembly Part Number

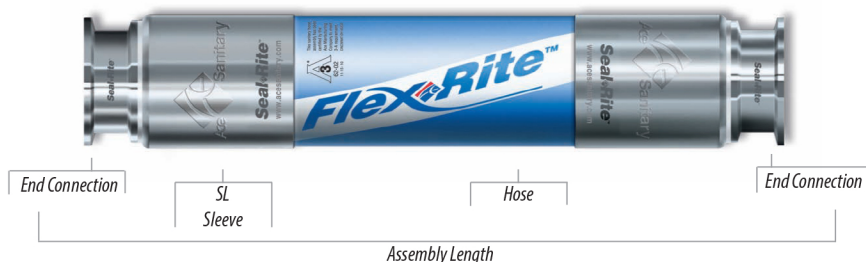

PSD	200	SL	200 TC	200 TC	S	180 (inches)
Hose	ID Size	Fitting Style	Size First End Connection	Size Second End Connection	Hose Sleeve Stainless	Assembly Length

Rubber

PSD	Gray Protector
PSDW	White Protector
GRC	Red Gladiator
SSW	Blue Sentry
REB	Red ExtremeFlex Bev
REBG	Gray ExtremeFlex Bev
RSD	Gray Suction & Discharge
RSDR	Red Suction & Discharge
RSDB	Blue Suction & Discharge
RES	LT Blue Premium S & D
RCR	Orange Crush Resistant
RBT	Purple Beverage
RWS	Red Wine & Sprits
RCT	White Comestible
RWD	Premium Washdown
TRS	Green EPDM/FEP Lined
SW630	Food Suction

PVC

CCT	Clear Tubing
CBT	Braided Tubing
CSS	Wire Helix

Silicone

SXW	Silicone Wire Reinforced
SXD	Silicone Multi Ply Discharge
SDB	Silicone Double Braid Discharge
SSD	Silicone Single Braid Discharge

Stainless Steel Overbraid PTFE

TSC	Silicone Covered PTFE Smooth Bore
TSB	SS Braided PTFE Smooth Bore
TCB	SS Braided PTFE Convolutd

Size Code

025	= 1/4"
037	= 3/8"
050	= 1/2"
062	= 5/8"
075	= 3/4"
100	= 1"
150	= 1-1/2"
200	= 2"
250	= 2-1/2"
300	= 3"
400	= 4"
600	= 6"

Coupler Style

Radial Crimp

End Connection

TC = Sanitary Clamp
 BS = Bevel Seat with Hex Nut
 BT = Bevel Male Thread
 IF = Female I-Line
 IM = Male I-Line
 JP = John Perry with Hex Nut
 JT = John Perry Male Thread
 MT = Male Pipe Thread
 TE = Tube End (Butt Weld)
 DF = Cam & Groove Female
 AM = Cam & Groove Male
 AF = Flange
 QL = Q-Line

Over all length tolerances for assemblies are:

- 1/4" on assemblies to 24"
- 1/2" on assemblies 25" to 60"
- 1% on assemblies over 60"

Build Your Custom Assembly in Just 7 Easy Steps.

- 1 Select code for hose style.
- 2 Specify hose ID.
- 3 Coupler style.
SL = radial crimp/permanent
- 4 & 5 Specify size and connection of each end fitting.
- 6 Hose sleeve material
S = Stainless Steel
- 7 Specify overall assembly length in inches.



Need help?

We can recommend the right hose for your application!
 Call our hose specialists for assistance.

Permanent Crimped

How to Order Sanitary Hose Assemblies

Build Your Assembly Part Number

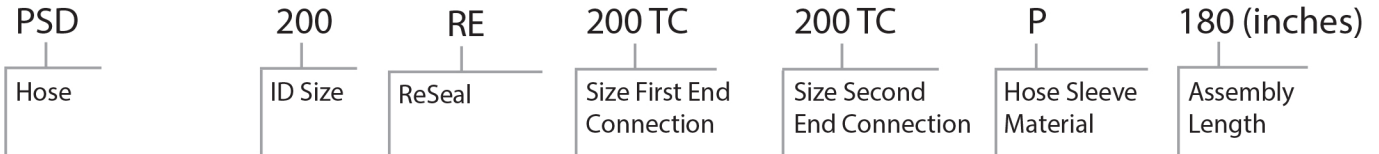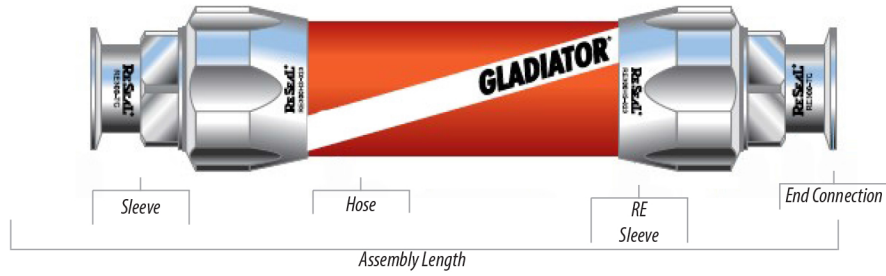

Rubber

PSD	Gray Protector	025 = 1/4"
PSDW	White Protector	037 = 3/8"
GCR	Red Gladiator	050 = 1/2"
SW630	Food Suction	062 = 5/8"
SSW	Blue Sentry	075 = 3/4"
CTL	White Challenger Teflon Lined	100 = 1"
MHH	MilkFlex	150 = 1-1/2"
BRH	Red Brewer	200 = 2"
		250 = 2-1/2"

PVC

CSC	Clear Helix	300 = 3"
CSW	White Helix	400 = 4"
MLT	White Helix - Low Temp	600 = 6"
CCT	Clear Tubing	
CBT	Braided Tubing	
CSS	Wire Helix	

Silicone

SPD	Single Ply Discharge	
FPD	Four Ply Discharge	
FPW	Wire Helix Suction & Discharge	

Size Code

025	= 1/4"
037	= 3/8"
050	= 1/2"
062	= 5/8"
075	= 3/4"
100	= 1"
150	= 1-1/2"
200	= 2"
250	= 2-1/2"
300	= 3"
400	= 4"
600	= 6"

Coupler Style

RE = Reusable

End Connection

TC = Sanitary Clamp
 BS = Bevel Seat with Hex Nut
 BT = Bevel Male Thread
 IF = Female I-Line
 IM = Male I-Line
 JP = John Perry with Hex Nut
 JT = John Perry Male Thread
 MT = Male Pipe Thread
 TE = Tube End (Butt Weld)
 DF = Cam & Groove Female
 AM = Cam & Groove Male
 AF = Flange
 QL = Q-Line

Hose Sleeve

S = Stainless
 P = Polymer

Assembly Length

Inches

Over all length tolerances for assemblies are:

- 1/4" on assemblies to 24"
- 1/2" on assemblies 25" to 60"
- 1% on assemblies over 60"

Build Your Custom Assembly in Just 7 Easy Steps.

- 1 Select code for hose style.
- 2 Specify hose ID.
- 3 Coupler style.
RE = reusable
- 4 & 5 Specify size and connection of each end fitting.
- 6 Select hose sleeve material.
Stainless or Polymer
- 7 Specify overall assembly length.

Need help?

We can recommend the right hose for your application!
 Call our hose specialists for assistance.